


PERIPHERAL HARDWARE.



RS232 to RS485 converter.

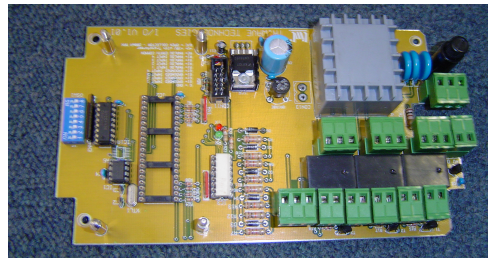

Input / Output unit.

- RS232 to RS485 is required for non Ethernet readers.
- Input / Output unit; to control doors, cameras, etc. Feedback to Application Software via inputs.

The following pictures describe a rubber mat measuring 2500 x 60 cm x 12mm thick. The low frequency (125Khz) & high frequency (433Mhz) antenna are moulded into the mat. Used for Passive / Active applications.

Top View →



Bottom →




Wires moulded into rubber mat.



←The Tags can be fitted under a vehicle and will be energised as follows –

- T330 approx. 1.5 meters.
- T403 approx. 1 meter.

←The 125Khz Energiser Unit.

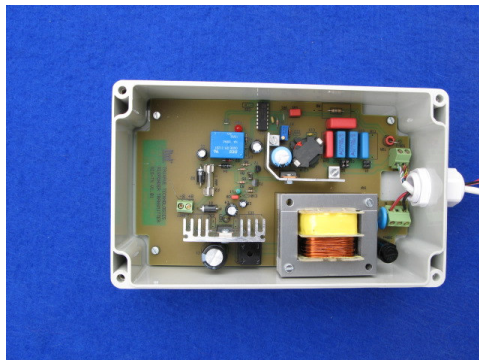

- IP65 housing 200x120x75mm.
- Mains powered 230Vac.
- Battery backup by adding battery.